



## Spicer® Single Reduction Single Axles

17060 Series

21060 Series

17,000 – 22,000 lbs.

19060 Series

22060 Series

**Roadranger®**

More time on the road™

## Single Reduction Axles Tough Enough for any Medium-Duty Application

Maximum performance and durability for city delivery, beverage hauling, rental fleet, utility truck, school bus, motorhome, or any medium-duty application.

**Advanced designs and the latest manufacturing technology mean lower life cycle cost.**

- Broad range of gear ratios allow for optimum powertrain specification.
- Viton™ oil seals keep lube in, dirt and road grime out.
- Involute splines on drive pinion and axle shafts for greater torque capacity.
- Precision Flow forged differential gears for greater strength and impact resistance.
- 060 Series models feature:
  - Reduced assembly weight for increased performance and productivity.
  - Optional driveline mounted parking brake.
  - Stronger wheel differential assembly to resist damaging shock loads.
  - Optional driver-controlled wheel differential lock for maximum traction over slippery or uneven surfaces.
- Optional limited slip differential for enhanced traction automatically.
- Optional GenTech™ gearing reduces noise level for vehicle occupants in coach and bus applications.
- Backed by comprehensive Roadranger® service support.



*Spicer® 21060 Single Reduction Single Axle*

# Spicer® Medium-Duty Single Drive Axle

## GAW Ratings\*:

MODELS	
17060S, 17060D, 17060L	17,000 lbs.
19060S, 19060D, 19060L	19,000 lbs.
21060S, 21060D, 21060L	21,000 lbs.
22060S, 22060D, 22060L	22,000 lbs.
22060SH	22,000 lbs.

## GCW Ratings\*:


MODELS	HIGHWAY	ON-OFF HWY	OFF HWY
17060S/D/L	60,000 lbs.	40,000 lbs.	45,000 lbs.
19060S/D/L	60,000 lbs.	50,000 lbs.	45,000 lbs.
21060S/D/L	60,000 lbs.	50,000 lbs.	45,000 lbs.
22060S/D/L	60,000 lbs.	50,000 lbs.	45,000 lbs.
22060SH	60,000 lbs.	50,000 lbs.	45,000 lbs.

\*Note: These are nominal ratings. Actual load rating varies with application duty cycle. Applications require Dana CVS Application Engineering approval.

## Available Ratios:

MODELS	RATIOS
17060S/D/L	3.08, 3.25, 3.36, 3.55, 3.70, 3.90, 4.11, 4.30, 4.33, 4.63, 4.78,
19060S/D/L	4.88, 5.29, 5.38, 5.57, 6.17, 6.50, 7.17
21060S/D/L	
22060S/D/L	
22060SH	4.30, 4.78

## Model Nomenclature:

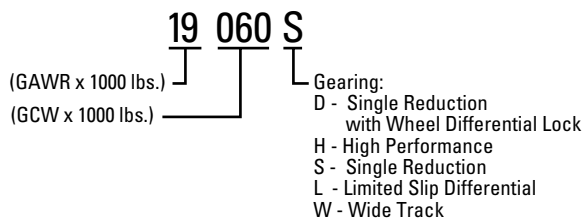

# Roadranger®



EATON

For spec'ing or service assistance, call 1-800-826-HELP (4357) 24 hours a day, 7 days a week (Mexico: 001-800-826-4357), for more time on the road. Or visit our web site at [www.roadranger.com](http://www.roadranger.com).

Roadranger: Eaton, Dana and other trusted partners providing the best products and services in the industry, ensuring more time on the road.